

# LT8711HE --- Product Brief

## Type-C/DP1.2 to HDMI2.0 Converter

### 1. Features

- **USB Type-C**
  - Compliant with VESA DisplayPort Alt Mode on USB Type-C standard V1.0
  - Compliant with USB Power Delivery specification R2.0, V1.0
  - Compliant with USB Type-C Cable and Connector specification R1.2
  - Built-in dual CC controllers for charger and normal communication
  - 3 data roles supported: DFP, UFP and DRP
  - 2 power roles supported: source and sink
- **DP1.2 Receiver**
  - Compliant with VESA DP1.2 and Embedded DisplayPort (eDP) v1.4
  - No HDCP decryption
  - 1/2/4 configurable data lanes
  - 1.62/2.7/5.4Gbps per data lane
  - Support SSC
  - 1Mbps AUX channel
  - Adaptive or programmable receiver equalization
  - Support lane swap(arbitrarily) and polarity inversion(independent)
  - Support 4k@60Hz
  - Support eDP Authentication: Alternative Scramble Seed Reset
- **HDMI2.0 Transmitter**
  - Compliant with HDMI2.0, HDMI1.4 and DVI1.0
  - Data rate up to 6Gbps
  - Support 4k@60Hz
  - Support TMDS scrambling for EMI/RFI reduction
  - Support SCDC
  - Programmable transmitter swing and pre-emphasis
  - Downstream receiver sensing
  - 5V tolerance DDC/HPD I/Os

- **Miscellaneous**

- External oscillator
- Integrated microprocessor
- Embedded SPI flash for firmware
- GPIOs for VBUS/VCONN/AUX and other system controls
- Integrated 100kHz I2C slave
- Firmware update through SPI, I2C interface
- Power supply: 3.3V for I/O and 1.2V for core
- ESD 2kV HBM
- Temperature range: -40°C ~ +85°C
- Package : 7.5mmx7.5mm QFN64

### 2. General Description

The LT8711HE is a high performance Type-C/DP1.2 to HDMI2.0 converter, designed to connect a USB Type-C source or a DP1.2 source to an HDMI2.0 sink.

The LT8711HE integrates a DP1.2 compliant receiver, and an HDMI2.0 compliant transmitter. Also, two CC controllers are included for CC communication to implement DP Alt Mode and power delivery function, one for upstream Type-C port and another for downstream port. The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the use of a dedicated configuration I2C slave interface.

LT8711HE also support EDID buffer, DP/eDP input detection and determine to enter into power saving mode automatically. When the receiver of LT8711HE locks the input signal, the MCU can read the recovered timing parameters by the MSA registers. The DPCD registers are accessible via system I2C when debugging the full link training.

### 3. Applications

- Docking Station
- Dongle

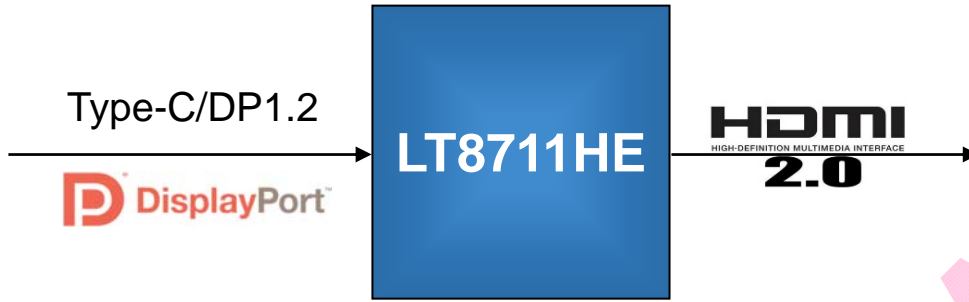


Figure 3.1 Application Diagram

## 4. Ordering Information

Table 4.1 Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method	MPQ
LT8711HE	-40°C to+85°C	QFN64 (7.5*7.5)	Tray	2600pcs



**Copyright © 2017-2022 Lontium Semiconductor Corporation, All rights reserved.**

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

**Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)**

**Technical support: [support@lontium.com](mailto:support@lontium.com)**

**Sales: [sales@lontium.com](mailto:sales@lontium.com)**